


LED BACK LIT PANEL

• SBLP •

■ Features

- The back lit panel are used with OSRAM led as light source and Mitsubishi PMMA as LGP witch insure the high quality of light output upto 90lm/w, average 3000lx on surface .
- One side or two side LED are depend on the size of the panel we developed 5 different of the aluminimun frame to fit for most of the application
- The thickness from 5.5MM-10MM to fit in different kind of shelf or rack
- With or without diffuser is optional
- One side with frame or 4 sides with frame is optional

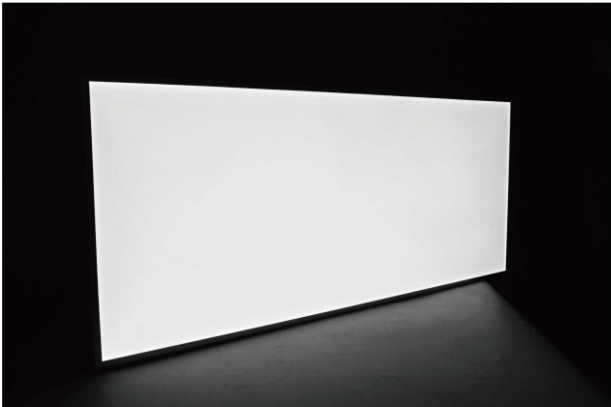


■ Specification


- Voltage . : 12V/24VDC
- Operating Temperature : 0-45°
- Light span : 50000hrs/70%
- Available : 2700-6500K / RGB/ WW+CW
- CRI : >80
- Lumen : 80-90lm/w
- IP20
- Max size : 2000 x 3000mm
- Customize size are welcome

■ Aluminum frames


Frame color : silver , black or white is available on request

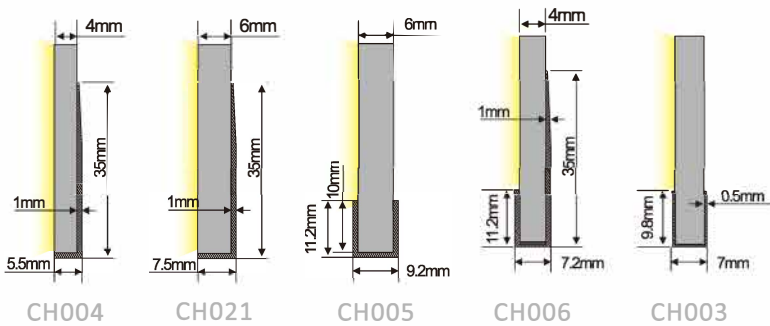

1 side frame

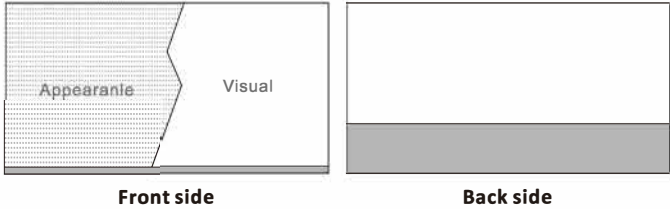

4 side frame

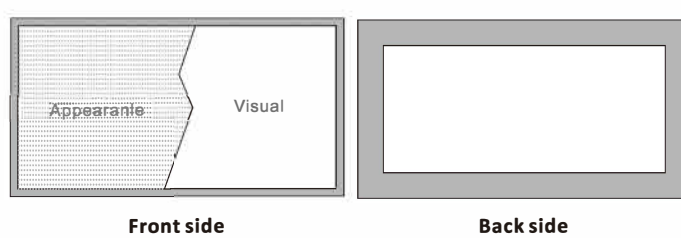

Usage illustration

